



RP0900

6.35mm Router

900W


Dustproof ball bearing
on the commutator end
ensures greater durability

Scale label
Easy-to-read for checking
the depth of cut

Lock lever
When the router head is unlocked,
the easy-to-operate lock lever
stays still at the release position,
not interfering with operation.



**3-stage adjustable
cut depth adjustment**
for precise and repetitive depth routing.

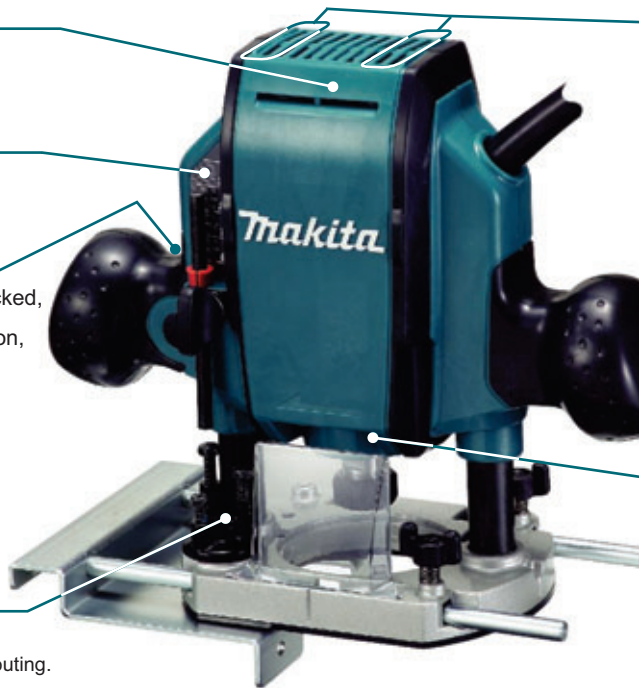

Can be placed upside down
The router can stand firmly
on the four raised ribs on the
upper end of the motor housing
when replacing accessories
or not in use.



Trigger switch
easily accessible and operable
when holding the grips.

Large ball bearing
on the drive end of the armature
ensures higher durability.



MAKITA ADVANTAGE

Redesigned exterior.

Higher durability obtained by using large ball bearings on the drive end of the armature and dustproof ball bearing on the commutator-end.

Transparent chip deflector prevents cutting chips from being scattered, and allows easy visibility on the cutter edge.

The trigger switch can be controlled while the contoured handle is being held.



SPECIFICATIONS:

Collet capacity	6.35mm
Continuous rating input	900W
No load speed	27,000r/min
Plunge capacity	0 - 35mm
Overall dimensions (L x W x H)	256 x 110 x 217mm
Net weight	2.7kg
Power supply cord	2.5m
Carbon brush	CB-106

FEATURES:

Double insulation

STANDARD EQUIPMENT:

Straight guide, straight bit, collet cone & wrenches