




# HR2230 & HR2460

## 22mm & 24mm

### SDS Plus Rotary Hammers

**HR2230**  
710W

**HR2460**  
780W

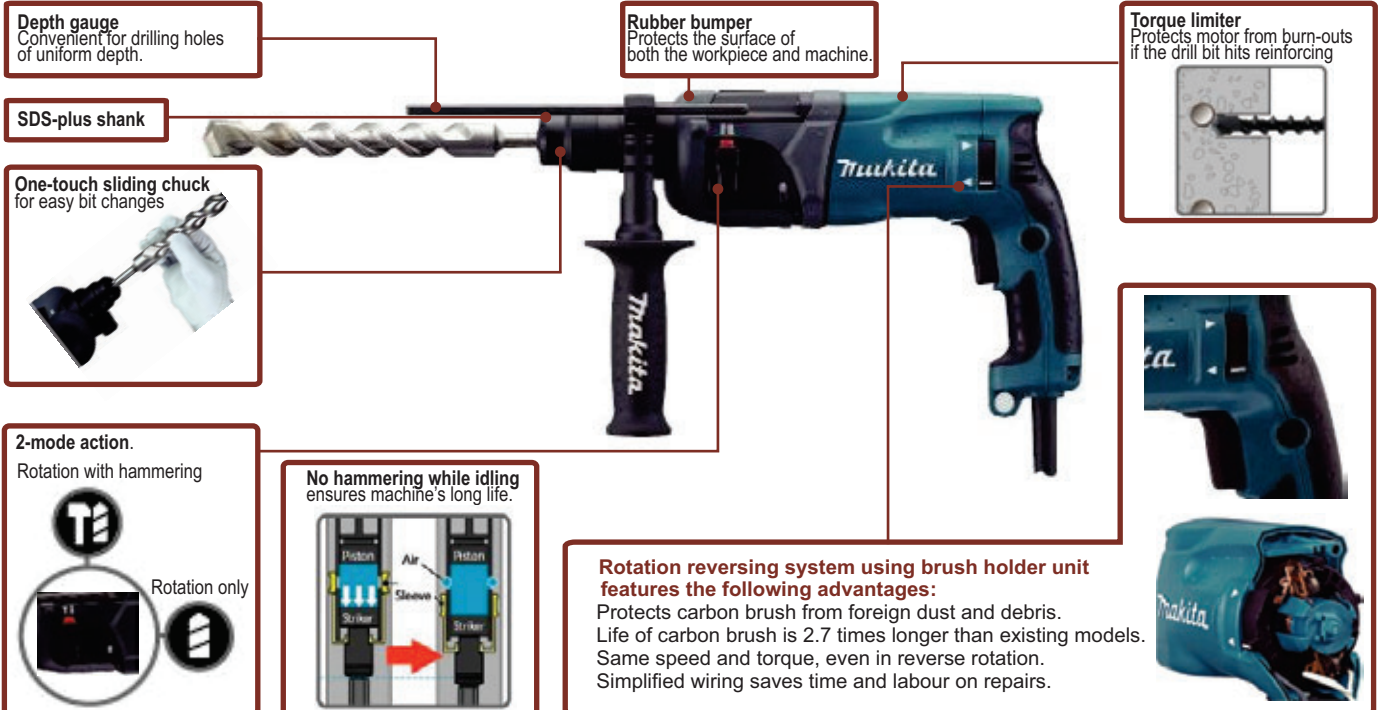

#### MAKITA ADVANTAGE


Added durability to impact bolt and rubber ring at the commutator end of armature.

The top portion of the tool holder, matching surface between inner housing and gear housing, as well as bearing portion on the drive-end of the armature are all designed to eliminate grease leakage.

High abrasion resistance in gears and inlaid portion of inner housing.

Anti-vibration construction of the motor section.

Inner construction is designed so as to direct the flow of cooling air to minimize the chance of armature wire breaking due caused by dust.

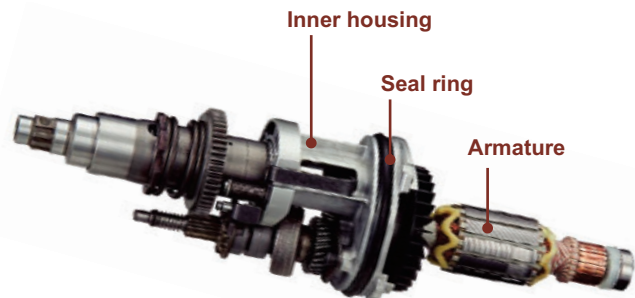

#### SPECIFICATIONS:

	HR2230	HR2460
Capacities		
Concrete	22mm	24mm
Steel	13mm	13mm
Wood	32mm	32mm
Continuous rating input	710W	780W
No load speed	0 - 1,050r/min	0 - 1,100r/min
Blows per minute	0 - 4,050	0- 4,500
Overall dimensions (L x W x H)	357 x 83 x 214mm	362 x 83 x 214mm
Net weight	2.6kg	2.8kg
Power supply cord	2.5m	2.5m
Carbon brush	CB325	CB325
Joule rating	2.3 Joules	2.7 Joules

#### FEATURES:

Double insulation, variable speed, reverse, SDS plus drive, torque limiter & carry case

#### STANDARD EQUIPMENT:

Depth gauge & side grip. (Tools do not come with bit)