

LED job light (DJR187ZK ONLY)



Retractable rafter hook (DJR187ZK ONLY)



BL
MOTOR
Brushless DC motor
(DJR187ZK ONLY)

2 Electronic 2-speed
(DJR187ZK ONLY)

Two-finger switch trigger

Soft grip
provides more comfort and control.


 Electric brake

Toolless blade change
Redesign of Blade clamp makes it easier to remove a blade.

Photo : DJR187ZK

Toolless shoe adjustment
(DJR187ZK ONLY)

Lever system is employed instead of button system.
It prevents the blade lock from unintentional releasing.



Powered by 18V Li-ion battery

with Battery fuel gauge

BL1850B : 5.0Ah

BL1830B : 3.0Ah

*BL1815N : 1.5Ah
(*without Battery fuel gauge)

Fast Charger
DC18RC



18V
LITHIUM-ION

Cordless Recipro Saw
DJR187ZK / DJR186ZK

-  Variable Speed
-  Electronic 2-speed
(DJR187ZK ONLY)
-  Brake
-  Built-in Job Light
(DJR187 ONLY)
-  Carrying Case

	DJR187ZK	DJR186ZK	441mm
Capacity	Pipe : 130mm Wood: 255 mm	Pipe : 130mm Wood: 255 mm	
Length of Stroke	32 mm	32 mm	
Strokes Per Minute (S/MIN)	High: 0-3,000 Low: 0-2,300	0-2,800	
Vibration Level	Cutting Boards: 16.5 m/s ² Cutting Wooden beams: 15.5 m/s ²	Cutting Boards: 13.0 m/s ² Cutting Wooden beams: 12.5 m/s ²	
Vibration K factor	1.5 m/s ²	1.5 m/s ²	
Sound Pressure Level	84 dB(A)	84 dB(A)	
Sound Power Level	95 dB(A)	95 dB(A)	
Noise K factor	3 dB(A)	3 dB(A)	
Dimensions (L x W x H)	439x83x231mm	486x81x223mm	
Net weight	BL1815N : 3.4kg BL1850B : 3.7kg	BL1815N : 3.5kg BL1850B : 3.8kg	

weight according to EPTA-Procedure 01/ver.2.1

Items of standard equipment and specifications may vary by country or area.

Battery and Charger Not Included!

Makita

Cordless Recipro Saw

Satisfy Professional's Needs
LXT
LITHIUM-ION

**High power and
High durability**



DJR187ZK



DJR186ZK



LXT
LITHIUM-ION






Photo: DJR187ZK

Newly designed vertical crank mechanism

And featuring high output Brushless DC motor, enabling outstanding performance in cutting work.
(DJR187ZK ONLY)




Smooth cutting with new crank system

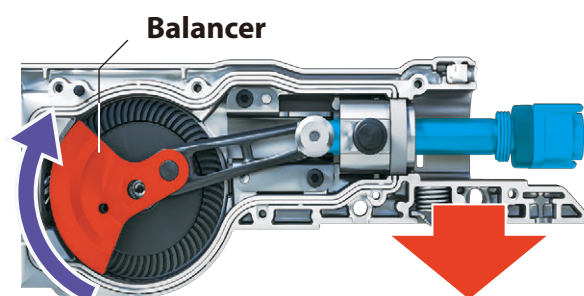

The rolling of Balancer decreases and materials are pushed stronger

Backward stroke is faster

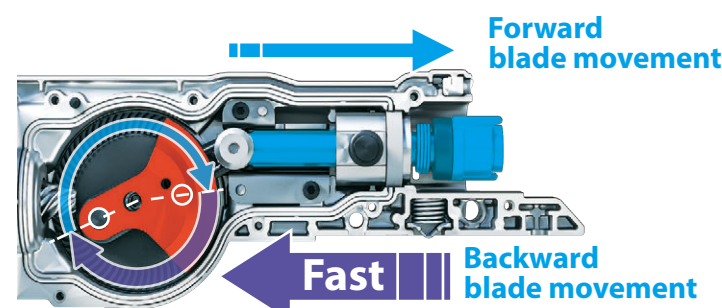

Backward rotating angle is less.

Long Stroke
32mm



High Speed
Strokes per minute
3,000min
(DJR187ZK ONLY)

High durability


More durable mechanism to hold slider

A roller on the rear end of slider reciprocates on the rail of metal plate, providing higher durability than the current mechanism using plane bearing as the rear slider holder.

Mechanical durability more than **twice**

More rigid shoe

- Shoe has been reinforced.
- Fixed type shoe is used for added durability.

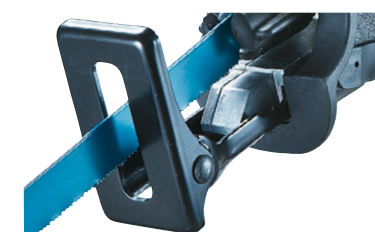

XPT
EXTREME PROTECTION TECHNOLOGY

