



Angle Grinder GA4540 115mm GA5040 125mm

Satisfy Professional's Needs



Angle Grinder



115mm	GA4540		125mm	GA5040	
Continuous rating Input	1,100W		Continuous rating Input	1,100W	
Wheel diameter	115mm		Wheel diameter	125mm	
No load speed (r/min)	11,000		No load speed (r/min)	11,000	
Dimensions (L x W x H)	303x130x116mm		Dimensions (L x W x H)	303x140x116mm	
Net Weight*	2.4kg		Net Weight*	2.4kg	
Power supply cord	2.5m		Power supply cord	2.5m	

Standard Equipment : Depressed Center Wheel, Lock Nut Wrench, Side Grip

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specications may vary by country or area.

SJS II

Drastic Evolution of Vibration Absorption



SJST II

SUPER JOINT SYSTEM




Photo : GA5040

To suppress vibration to operator




Structure of Super Joint System II

Leaf spring absorbs vibration and relieves shock during operation.

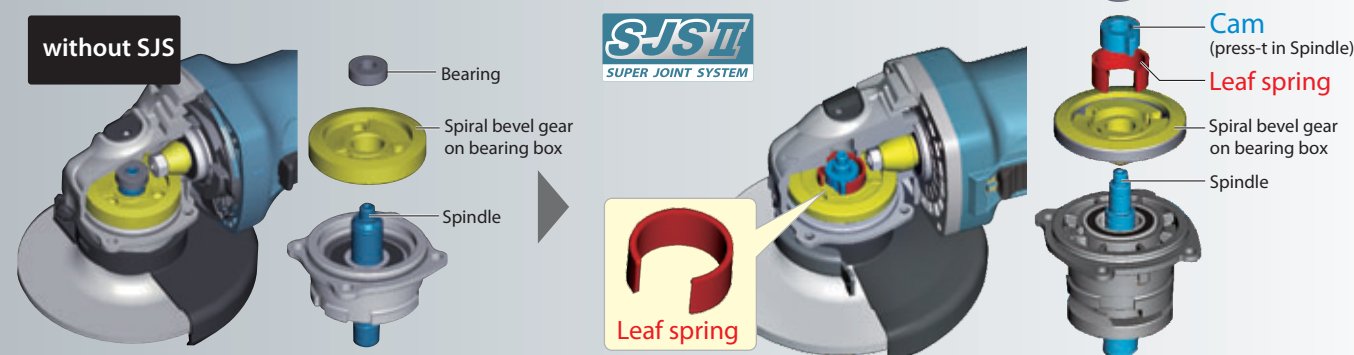

Absorption mechanism of vibration

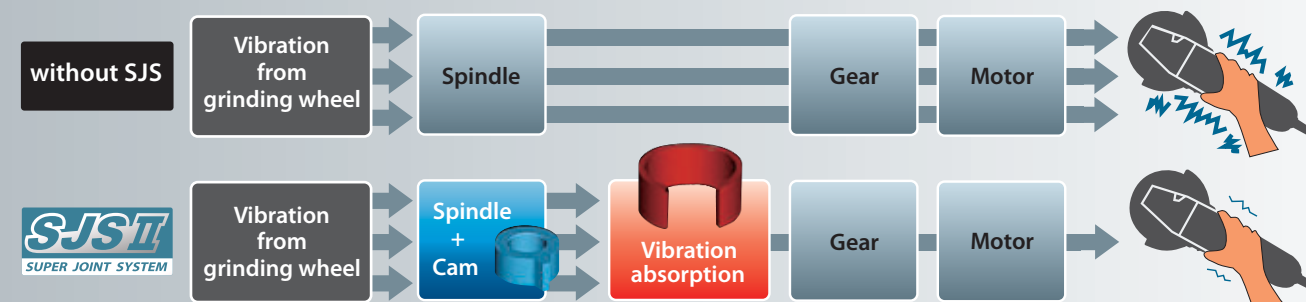

Durable shaft lock

Re-designed durable shaft lock firmly supported by metal sleeve built in gear housing prevents cracks in gear housing and drop of pin cap.



Anti-vibration grip (Option 194514-0)
for extra comfort



Toolless wheel cover (Option 123145-8)
Toolless wheel cover is adjustable to any desired position without tool.



Barrel grip
Ergonomically best possible barrel grip with a perfect circumference size and shape fits your hand for extra comfortable handling



Tool-less special lock nut 14-45 (Option 192567-3)
Tool-less lock nut is available as an option to replace wheel without wrench.

SJST II

SUPER JOINT SYSTEM